
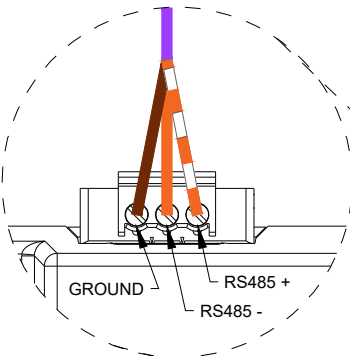


TO RS485
BMS SYSTEM

SDN Bus Wiring Pinout		
CAT-5e or higher TIA-568B standard with RJ-45		
Pin #	Color	Function
1	Orange White	SDN RS485 (+)
2	Orange	SDN RS485 (-)
3	Green White	Reserved
4	Blue	Power 24v DC
5	Blue White	Power 24v DC
6	Green	Reserved
7	Brown White	SDN RS485 Ground
8	Brown	SDN RS485 Ground






Standard CAT-5e
or higher cable

**Somfy Connect BMS
#1870249**


- Somfy Connect BMS can be configured for BACnet MS/TP, BACnet IP, Modbus or Modbus IP. Can support both RS485 or IP connections, but not both simultaneously.

TO IP BMS
SYSTEM

Standard CAT-5e
or higher cable

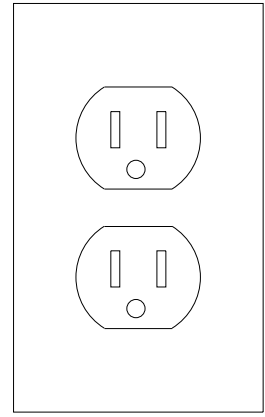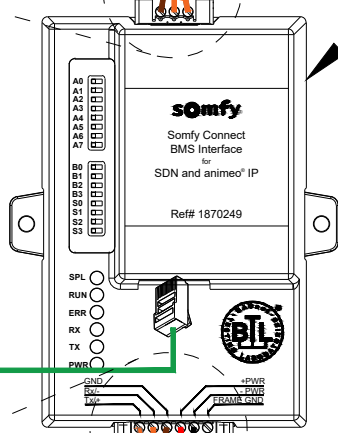

**24V DC Wall Mount Power Supply
#1822209**
(Included with Somfy Connect BMS)

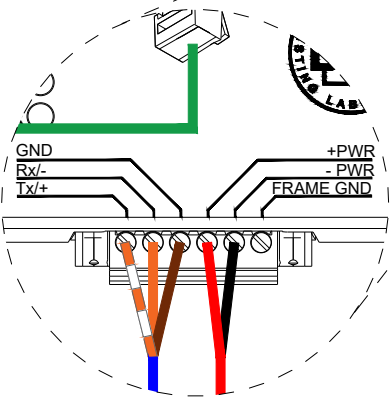

TO ANY SDN
DEVICE PORT

© 2015 Somfy Systems, Inc. All Rights Reserved. This drawing is the property of Somfy Systems, Inc. The graphics, information and specific ideas in this document are the exclusive property of Somfy Systems, Inc. and must not be made public, copied, or sold. Others seeking permission to reproduce this document, in whole or in part, must obtain permission from Somfy Systems, Inc. in writing.

Tel: 1-800-64-SOMFY
Fax: 1-609-495-8165
www.somfysystems.com



Date:	11/05/18	Rev	Date	By	Revisions	Description
Print Size:	8.5" x 11"	-	--/--/--	-		
Scale:	NTS	-	--/--/--	-		
Sales:	N/A	-	--/--/--	-		
Drawn by:	RV	-	--/--/--	-		
Checked by:	PK	-	--/--/--	-		

Dwg Title:
**Somfy Connect BMS
for SDN
Wire Detail**

Dwg No.:
BMS-WIRING-01

Project name:
Technical Library

Client:
Somfy Systems, Inc.

Address:
**121 Herrod Boulevard
Dayton, NJ 08810**